


## Charging Station VOLTDRIVE SILENTIUM L

VOLTDRIVE SILENTIUM charging stations provide safe charging of electric vehicle batteries

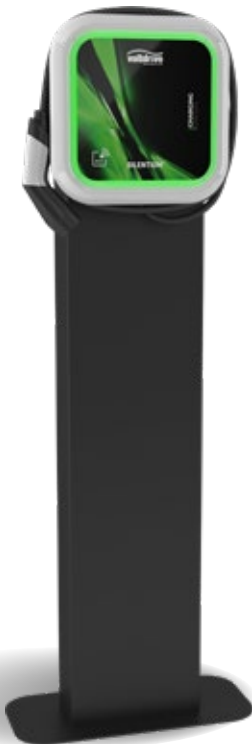

### WALL MOUNTED / BOLLARD

- Automatic charging on connecting the charging cable or with RFID card

- 1x charging point, 230/400 V max. 32 A [single phase, three-phase]
- Connection: socket, straight cable, spiral cable TYPE2 according to IEC 62196
- LED indicator light
- Overcurrent and differential protection
- Circuit breaker TYPE B for each charging point
- Plastic station design
- Weight 5 kg [socket version]
- Dimensions 370 x 370 x 130 mm
- Ingress protection IP54 according to ČSN EN 60529
- Impact protection IK10
- Operating temperature -30°C to +50°C

### Optional accessories for BASIC stations

- RFID authorisation
- Electricity meter
- Delayed start
- ENERGY SYSTEM VoltGuard
- Custom design [charging station stickers]